

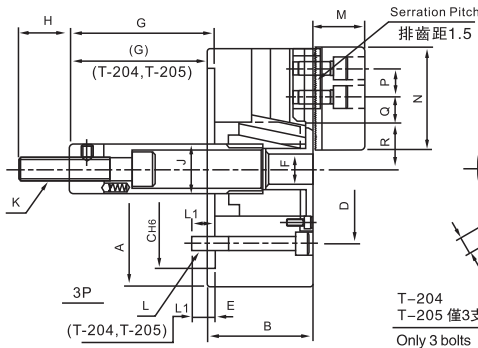
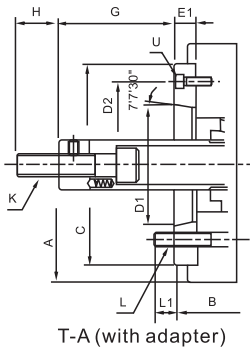
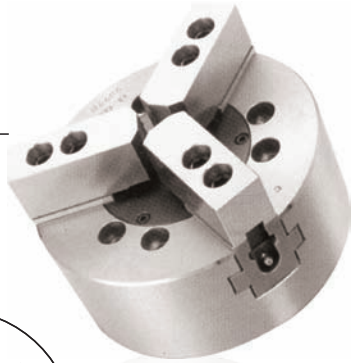


中實動力夾頭 (三爪高速中實型)

3-JAW NON THRU POWER CHUCK

- ◎ 楔形三爪中實夾頭。
- ◎ 折動面均經硬化及精密研磨，并直接潤滑。
- ◎ 高剛性結構及高夾持精度。
- ◎ It's a WEDGE-HOOK type 3-jaw power chuck.
- ◎ Matching surfaces of all parts hardened, ground and lubricated directly.
- ◎ Construction of high rigidity and high clamping accuracy.

T-208A5
T-210A6
T-212A6
Refer to Fig.A



規格 Spec 型號 Model	楔心行程 Plunger stroke (mm)	爪行程(直徑) Jaw stroke (Dia.) (mm)	夾持直徑 chucking Dia.(mm)		容許油壓缸推力 Max.D.B.Pull (kgf)	最大夾持力 Max clamping force (kgf)	最高回轉速 max r.p.m	慣性矩 kg·m ²	重量 (kg)		適合油壓缸 Matched cylinders
			最大Max	最小Min							
T-204			110	7	940	1930	8000	0.01	3.8		S-65
T-205	A4	15	135	12	1190	2440	7000	0.02	6.5	7.3	S-80
T-206	A5	20	169	15	1470	3870	6000	0.06	11.5	13.3	S-100
T-208	A5	21	8.8	210	13	2360	5840	0.17	21.3	24.2	S-125
	A6									22.4	
T-210	A6	25	8.8	254	31	2900	7540	0.31	33.5	40.5	S-125
	A8									39	
T-212	A8	30	10.5	304	34	3740	9780	0.70	59.7	62.7	S-150
T-215	A11	35	16	381	50	4790	12200	2.23	115	122	S-200

寸法 Size 型號 Model	A	B	C(H6)	D	D1	D2	E	E1	F	Gmax.	Gmin.	H	J			
T-204	110	59	85	70.6	-	-	-	-	26	18	3	17.5	-			
T-205	A4	135	60	71	110	82.6	63.51	96	4	33	9	20	-			
T-206	A5	169	81	91	140	104.8	82.56	116	15	45	101.5	86.5	81.5	66.6	19	21
T-208	A5	210	91	109	170	133.4	106.38	133.4	23	52	127	104	106	83	20.5	25
	A6								17			110		89		
T-210	A6	254	100	120	220	171.5	139.72	190	25	75	158	133	133	108	25	34
	A8											113		140		
T-212	A8	304	110	122					6	91	163	145		115	28	-
T-215	A11	381	133	149	300	235	196.87	260	22	117.5	104	82	69	47	39	-

寸法 Size 型號 Model	K max	L	L1	M	N	P	Q max	Q min	R max	R min.	S	T	U		
T-204	M10x1.5	3-M8	12	-	24	52	14	11.3	8.3	23.3	20.1	23	-		
T-205	A4		M12x1.75	14	-	31	62	13.5	6	30.4	27.2	25	10	-	
T-206	A5	M16x2	6-M10	14	14	37	73	20	18	7.5	37.8	33.5	31	12	-
T-208	A5	M20x2.5	6-M12	20	18	38	95	25	22.3	11.8	46.3	41.9	35	14	6-M10
	A6														3-M6
T-210	A6	M20x2.5	6-M16	18	25	43	110	30	30.8	11.3	51.1	46.7	40	16	6-M12
	A8														3-M8
T-212	A8	M20x2.5				51	130		48.8	12.3	61	55.8	50	21	-
T-215	A11	M30x2.5	6-M20	30	33	66	165	43	48.8	23.3	77.5	69.5	62	25	4-M10

* 保留技術更改的權利，恕不另行通知 Subject to technology changes without prior information
* 非標需求可訂做 Non-standard requirements can be made